


Rec'd PCT/PTO 20 OCT 2000

FORM PTO-1390 (REV 10-95)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				0074-26485GWW	
				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 09/673808	
INTERNATIONAL APPLICATION NO. PCT/NZ99/00049		INTERNATIONAL FILING DATE (23.04.99) 23 April 1999		PRIORITY DATE CLAIMED (23.04.98) 23 April 1998	
TITLE OF INVENTION AN IN-LINE EARLY REFLECTION ENHANCEMENT SYSTEM FOR ENHANCING ACOUSTICS					
APPLICANT(S) FOR DO/EO/US POLETTI, Mark					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendemnts has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). 					
Items 11. to 16. below concern document(s) or information included:					
<ol style="list-style-type: none"> 11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input type="checkbox"/> A substitute specification. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: <ul style="list-style-type: none"> - Transmittal of Letter to the United States Designated/Elected Office (DO/EO/US) by Express Mail; - Total Fees: check in the amount of \$1436.00; and - Post card receipt. 					

U.S. APPLICATION NO. (if known, see 37 CFR 1.53) 09/673808		INTERNATIONAL APPLICATION NO. PCT/NZ99/00049		ATTORNEY'S DOCKET NUMBER 0074-26485GWW	
17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : Search Report has been prepared by the EPO or JPO International preliminary examination fee paid to USPTO (37 CFR 1.482) No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)				CALCULATIONS PTO USE ONLY <div style="text-align: right; font-size: 1.2em;">1000.00</div>	
				ENTER APPROPRIATE BASIC FEE AMOUNT = \$ 1000.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$ 130.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	22 - 20 =	2	X 18.00	\$ 36.00	
Independent claims	2 - 3 =	0	X 80.00	\$ 0.00	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+270.00	\$ 270.00	
TOTAL OF ABOVE CALCULATIONS =				\$ 1436.00	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$ ---	
SUBTOTAL =				\$ 1436.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$ ---	
TOTAL NATIONAL FEE =				\$ 1436.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$ ---	
TOTAL FEES ENCLOSED =				\$ 1436.00	
				Amount to be:	\$
				refunded	
				charged	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>1436.00</u> to cover the above fees is enclosed.					
b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>04-1406</u> . A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO CUSTOMER NUMBER 000110 or DANN, DORFMAN, HERRELL AND SKILLMAN, P.C. 1601 Market Street, Suite 720 Philadelphia, PA 19103-2307 Tel: 215-563-4100 Fax: 215-563-4044				<div style="font-size: 1.5em; margin-bottom: 5px;">  </div> SIGNATURE VINCENT T. PACE NAME <u>31,049</u> REGISTRATION NUMBER	

422 Rec'd PCT/PTO 20 OCT 2000

AN IN-LINE EARLY REFLECTION ENHANCEMENT
SYSTEM FOR ENHANCING ACOUSTICS

5 **TECHNICAL FIELD**

The invention comprises an in-line early reflection enhancement system and method for enhancing the acoustics of a room or auditorium.

10 **BACKGROUND**

15 The acoustics of a room has a significant impact on an audience's perception of the quality of a live performance. There are a number of properties of rooms that have been identified as being correlated to subjective impressions of quality. The earliest measured parameter was the reverberation time. This is a global property of the room which has a similar value at all locations. It is governed by the room volume and the absorption of the room surfaces, and the quality of reverberation is also governed by the room shape. Rooms with a long reverberation time can provide a sense of envelopment which produces an increased enjoyment of performances such as opera or classical music. However, the same acoustics can reduce the intelligibility of the spoken word, and therefore be unsuitable for speech.

20 Other parameters have been determined which relate to the properties of the early part of the response, such as the clarity. More recent auditoria have been designed with reflectors specifically placed to enhance the early part of the room response to sounds emanating from the stage.

25 To achieve maximum enjoyment of a variety of performances, the acoustics of a room must be matched to the intended performance. Many rooms have for this reason been made acoustically adjustable. For example adjustable absorbers such as moveable curtains or rotatable panels have been used to control reverberation time. Extra acoustic spaces have been constructed which can be coupled to the main area when required to provide more reverberance.

Electroacoustic systems have been used for many years to enhance the acoustics of rooms. The simplest system is the public address or sound reinforcement system, in which the sound produced by performers on stage is detected by close microphones and the sound amplified and broadcast from one or more sets of loudspeakers. The goal of such systems is typically to project the direct, unreverberated, sound to the audience to eliminate the effects of the room and improve clarity.

More recently, more complex forms of sound system have been developed which aim to provide adjustable room acoustics. The basic sound reinforcement system has been further developed by introducing sound processing elements such as delays, which allow the creation of additional sound reflections - see W. Anhert, "Complex simulation of acoustic fields by the delta stereophony system (DDS)," *J. Audio Eng. Soc.*, vol. 35, no. 9, pp 643-652, September 1987, and US patent 5,142,586. The delta stereophony system described by Anhert provides sound reflections that are arranged to arrive later than the direct sound, in order to maintain correct localisation. For a given receiver location, the appropriate delays can be chosen to avoid preceding the direct sound, but the delays must be changed for different receiver positions. The ACS system described in US patent 5,142,586 claims to provide reflections at the appropriate times for all receiver positions, by the creation of wavefronts. The delays are chosen using Huygens principle, and their quantification mathematically by integral equations is described by A. J. Berkout, D. de Vries, and P. Vogel, "Acoustic control by wave field synthesis," *J. Acoust. Soc. Am.*, vol. 93, no. 5, pp 2764-2778, May 1993. The wavefronts are generated using loudspeaker arrays. These electroacoustic systems offer a more controllable early reflection response than can be achieved using passive reflectors.

Reverberators have also been introduced to provide a larger reverberation time for sources on stage - see for example US patent 5,109,419. Larger numbers of speakers have also been employed to provide enhanced reflections and reverberation, such as to under balcony areas. The microphones have also been positioned further from the performers so as to be less obtrusive, while still aiming to detect the direct sound.

The systems discussed above avoid feedback from the loudspeakers to the microphones, since such feedback can lead to colouration and instability if the loop

gain is too high. Because of this fact, they may be generically termed in-line, or non-regenerative, systems. Such systems can provide large increases in reverberation for sound sources that are close to the microphones (ie on stage), but they have a small effect for sound sources at other positions in the room.

5

A second type of enhancement system is the non-in-line, or regenerative, system, which seeks to utilise the feedback between loudspeakers and microphones to achieve a global enhancement of reverberation that occurs for any sound source position - see A. Krokstad, "Electroacoustic means of controlling auditorium acoustics," *Applied Acoustics*, vol. 24, pp 275-288, 1998 and F. Kawakami and Y. Shimizu, "Active field control in auditoria," *Applied Acoustics*, vol. 31, pp 47-75, 1990. Since the natural, unassisted reverberation time is largely the same for all source positions, the regenerative systems can provide a more natural enhanced reverberation. Non-in-line systems typically use a large number of independent microphone, amplifier, loudspeaker channels, each with a low loop gain. Each channel provides a small enhancement of reverberation at all frequencies, with low risk of colouration, and the combined effect of all the channels is a significant increase in reverberation and loudness. The microphones are positioned in the reverberant field from all sound sources in the room to ensure that the system produces a similar enhancement for all sources. Non-in-line systems, however, have typically required from 60 to 120 channels, and have therefore been expensive. Furthermore, since the microphones are remote from all sources, they are less suited to providing significant early reflections than in-line systems.

More recently, a non-in-line system has been developed which uses a multichannel reverberator between the microphones and loudspeakers to provide an increase in reverberation time without requiring an increase in loop gain - see US patent 5,862,233. It has been shown that the system can both reduce the apparent room absorption (by increasing the loop gain) and increase the apparent room volume (by increasing the reverberation time of the reverberator) - see M. A. Poletti, "The performance of a new assisted reverberation system," *Acta Acustica*, 2 December 1994, pp 511-524. In general, a hybrid room enhancement system may be constructed in which some of the microphones of a non-in-line system containing a reverberator are moved close to the source. In this case the system demonstrates properties of both in-line and non-in-line systems - see M. A. Poletti, "The analysis

of a general assisted reverberation system," accepted for publication in *Acta Acustica* vol. 84, pp 766-775, 1998.

When used solely for early reflection enhancement, an in-line system provides a
5 finite number of delayed outputs to simulate early reflections. However, if operated at moderate to high gains, the system runs the risk of instability. This is particularly likely if new delays/reflections are added which will increase the loop gain at some frequencies.

10 In any sound system, it is important that the direct acoustic sound from the stage arrives at every member of the audience before (or at the same time as) any electroacoustic signal. This is because the perception of localisation is governed by the first signal to arrive at the ears (provided later signals are not overly large). Hence, care must be taken in both in-line and non-in-line systems to ensure that
15 the electroacoustic signals are suitably delayed. In a non-in-line system this can be achieved by keeping the microphones a suitable distance from the stage. Delays can be used in in-line systems and non-in-line systems to avoid preceding the direct sound. Care must therefore be taken in any non-in-line system where microphones are moved close to the stage.

20

SUMMARY OF INVENTION

In broad terms in one aspect the invention comprises an in-line early reflection generation system comprising:

25 one or more microphones positioned close to one or more sound sources so as to detect predominantly direct sound;

an early reflection generation stage which generates a number of delayed reproductions of the microphone signals and which has unitary power gain whereby the stability of the system is independent of the delay times and amplitudes;

30 a number of loudspeakers placed to broadcast the early reflected energy into the room.

The in-line early reflection generation stage may include a number of delay lines which are preceded or followed by cross coupling matrices.

The system and method of the invention do not attempt to optimise the delay time for individual receiver positions as in delta stereophony, nor create wavefronts as in the ACS system. Instead, early reflections are generated in such a way that the stability of the system is maximised. This is achieved by ensuring that the reflection generation circuit has a unitary property.

In the system and method of the invention unitary circuit principles are applied to an in-line reflection generation system. In any early reflection system there is a finite level feedback of sound from the loudspeakers to the microphones via the reverberant field in the room. The generation of multiple reflections via multiple delays and amplitude weightings in prior art early reflection systems increases the risk of instability by creating variations in the loop gain both below and above the levels that would have existed without the system.

However, if the system has a transfer function matrix which is unitary, then the power gain of the system is one at all frequencies, and the stability of the sound system is not compromised by the insertion of the early reflection system.

Suppose the matrix of transfer functions through the early reflection system is $X(f)$. The unitary property states that

$$X^H X = I$$

1

where the H superscript denotes the conjugate transpose of the matrix. Consider a single frequency f_0 applied to each input of X , with amplitude A_n and phase ϕ_n . The input signal $s_{in}(t)$ may be written

$$s_{in}(t) = e^{j2\pi f_0 t} u$$

2

where u is the complex amplitude vector

$$u = [A_1 e^{j\phi_1}, A_2 e^{j\phi_2}, \dots, A_N e^{j\phi_N}]^T \quad 3$$

The total output power is

$$y^H(t)y(t) = u^H X^H(f_0)X(f_0)u = u^H u \quad 4$$

since X is unitary. Hence, the power gain of a unitary system is one at all frequencies, and does not affect stability when inserted into a multichannel system which contains feedback.

10

US patent number 5,729,613 describes a multi-channel reverberator which has this unitary property. This device provides multiple channels of reverberation while maintaining a constant power gain with frequency, and is designed for application in a non-in-line system for reverberation time enhancement, as described in US
 15 patent 5,862,233. The device contains multiple channels of internal feedback which creates an infinitely long decaying response, and a rapidly increasing density of echoes which are perceived as reverberation.

In this invention early reflection systems are disclosed which also have a unitary
 20 property. They are distinguished from the unitary reverberator in that they do not contain internal feedback, and do not produce an infinite decaying response. Instead they produce a finite response consisting of a relatively low number of discrete echoes. The response is therefore not perceived as reverberation.

25 It is important to note that in the unitary early reflection system of the invention there is no recursion in the reflection system, ie there is not feedback of the outputs of delay lines to the inputs of delay lines. In contrast to a reverberator the response of the reflection system is therefore finite - the response to an impulse is a short burst of echoes then silence. Also, the density of the echoes will never reach that of
 30 a reverberator. Typically system of the invention will have a response time of only 80ms or so, and the echo density never reaches that of a reverberator.

BRIEF DESCRIPTION OF THE FIGURES

The invention is further described with reference to the accompanying figures, by way of example and without intending to be limiting, in which:

5

Figure 1 shows the layout of an early reflection system of the invention,

Figure 2 shows a unitary n-channel delay line system as the early reflection generation stage,

10

Figure 3 shows a unitary cross-coupled n-channel delay system including an orthonormal matrix before the delay lines as the early reflection generation stage,

15

Figure 4 shows a unitary dual cross-coupled n-channel delay system using orthonormal matrices both before and after the delay lines as the early reflection generation stage,

20

Figure 5 shows a two stage unitary dual cross-coupled n-channel delay system with cascaded orthonormal matrices and delay lines between each two matrices as the early reflection generation stage, and

25

Figure 6 shows a non-in-line assisted reverberation system for controlling the global reverberation time of a room or auditorium with which the in-line early reflection system of the invention may be combined.

DETAILED DESCRIPTION OF PREFERRED FORMS

30

Figure 1 shows the layout of an early reflection system of the invention. A number of microphones m_1 to m_N are positioned close to the sources on stage. The microphone signals are fed to a processor which generates a number of scaled and delayed replicas of the N microphone signals, and the processor outputs are fed to amplifiers and loudspeakers L_1 to L_K placed in the room. The transfer function matrix of the processor is denoted $X(f)$.

The microphones are typically directional, that is, they are sensitive to sound sources positioned on axis, and tend to suppress sound sources (and reflections and reverberation) which are positioned off-axis. This maximises the direct sound pickup and reduces the risk of feedback from the loudspeakers. However, a finite level of feedback may still exist, and if the loop gain of the system is too high, the system will become unstable. The transfer function matrix from the loudspeakers to the microphones is $H(f)$, and the loop transfer function matrix is thus $H(f)X(f)$. If the locus of any eigenfunction of $H(f)X(f)$ encircles the point $(1+j0)$, the system will be unstable.

The stability of the system can be maintained by keeping the loop gain low, for example by keeping the amplifier or microphone preamplifier gains low. However, for a given setting of amplifier gains, the stability of the system is dependent on the particular delay times and delay levels in the processor. Hence, the system stability cannot be guaranteed once the amplifier gains are set. However, if $X(f)$ has a unitary property, its power gain is unity at all frequencies. The stability is then independent of the delay times and levels.

Unitary early reflection systems of the invention may be constructed using non-cross-coupling delay lines and orthonormal cross coupling matrices. The simplest N channel system comprises N delay lines connecting N microphone signals to N loudspeakers, as shown in figure 2. This system generates a single delay at each output for a signal applied to its respective input. The transfer function matrix is

$$X = D = \begin{bmatrix} \exp\{-j\omega T_1\} & 0 & 0 & 0 \\ 0 & \exp\{-j\omega T_2\} & 0 & 0 \\ 0 & 0 & \exp\{-j\omega T_3\} & 0 \\ 0 & 0 & 0 & \dots \\ 0 & 0 & 0 & \exp\{-j\omega T_N\} \end{bmatrix} \quad 5$$

This has a diagonal form since there is no cross coupling. The system is unitary since $D^H D = I$.

Figure 3 shows the use of an orthonormal cross coupling matrix in a more complex system of the invention. An orthonormal matrix M_1 is placed before the delay lines

T_1 - T_N so that a signal applied to any one input is coupled into every delay line, resulting in a single scaled and delayed reproduction of that signal at every output. The transfer function matrix is

$$X = DM_1 \quad 6$$

This system is unitary since both M_1 and D are unitary, and the product of unitary matrices is unitary.

- 10 Figure 4 shows the use of orthonormal matrices M_1 and M_2 both before and after the delay lines T_1 and T_N . A single impulse applied to one of the inputs is applied to all N delay line inputs, and appears at times τ_n later at the delay outputs. The N delayed impulses are then cross coupled to every output. Thus, N output delays are generated at each output for a single applied impulse. The circuit thus has the
- 15 property of diffusing the inputs and providing the maximum number of outputs for any input. The matrix transfer function of the circuit is the product of the transfer function matrices of each section

$$X = M_2 DM_1 \quad 7$$

20 Figure 5 shows cascading multiple systems of the form in figure 4. This system generates N^2 scaled delayed reproductions of a signal applied to any single input at every output. Hence the delay density increases rapidly with the number of delay stages.

- 25 The early reflection enhancement system of the invention may also be combined with a non-in-line assisted reverberation system for controlling the global reverberation time so that the reverberation time is similar for all source positions in the room, of the type described in US patent 5,862,233. Such a system comprises
- 30 multiple microphones positioned to pick up predominantly reverberant sound in a room, multiple loud speakers to broadcast sound into the room, and a reverberation matrix connecting a similar bandwidth signal from each microphone through a reverberator having an impulse response consisting of a number of echoes the density of which increases over time, to a loudspeaker. The reverberation matrix

may connect a similar bandwidth signal from each microphone through one or more reverberators to two or more separate loudspeakers and each of which receives a signal comprising one or more reverberated microphone signal. Figure 6 shows a wideband, N microphone, K loudspeaker non-in-line system. Each of microphones, m_1 , m_2 and m_3 picks up the reverberant sound in the auditorium. Each microphone signal is split into a number of K of separate paths, and each 'copy' of the microphone signal is transmitted through a reverberator, (the reverberators typically have a similar reverberation time but may have a different reverberation time). Each microphone signal is connected to each of K loudspeakers through the reverberators, with the output of one reverberator from each microphone being connected to each of the amplifiers A_1 to A_3 and to loudspeakers L_1 to L_3 as shown ie one reverberator signal from each microphone is connected to each loudspeaker and each loudspeaker has connected to it the signal from each microphone, through a reverberator. In total there are N.K connections between the microphone and the loudspeakers. While in Figure 6 each microphone signal is split into K separate paths through K reverberators resulting in N.K connections to K amplifiers and loudspeakers, the microphone signals could be split into less than K paths and coupled over less than K reverberators, ie each loudspeaker may have connected to it the signal from at least two microphones each through a reverberator, but be cross-linked with less than the total number if microphones. For example, in the system of Figure 2 the reverberation matrix may split the signal from each of microphones m_1 , m_2 and m_3 to feed two reverberators instead of three, and the reverberator output from microphone m_1 may then be connected to speakers L_1 and L_3 , from microphone m_2 to speakers L_3 and L_2 , and from microphone m_3 to speakers L_2 and L_3 . It can be shown that the system performance is governed by the minimum of N and K, and so systems of the invention where $N=K$ are preferred. In Figure 6 each loudspeaker indicated by L_1 , L_2 and L_3 could in fact consist of a group of two or more loudspeakers positioned around an auditorium. In Figure 6 the signal from the microphones is split prior to the reverberators but the same system can be implemented by passing the supply from each microphone through a single reverberator per microphone and then splitting the reverberated microphone signal to the loudspeakers.

The system simulates placing a secondary room in a feedback loop around the main auditorium with no -two way acoustic coupling. The system allows the

reverberation time in the room to be controlled independently of the steady state density by altering the apparent room volume.

The foregoing describes the invention including preferred forms thereof. Alterations
5 and modifications as will be obvious to those skilled in the art are intended to be incorporated within the scope hereof.

096706-0404
PCT/NZ99/00049

CLAIMS

1. An in-line early enhancement generation system comprising:
 one or more microphones positioned close to one or more sound sources so
 as to detect predominantly direct sound;
 an early reflection generation stage which generates a number of delayed
 reproductions of the microphone signals and which has unitary power gain
 whereby the stability of the system is independent of the delay times and
 amplitudes;
 a number of loudspeakers placed to broadcast said early reflected energy
 into the room.
2. An in-line early reflection enhancement system according to claim 1
 wherein the early reflection generation stage also includes at least one cross
 coupling matrix.
3. An in-line early reflection enhancement system according to claim 1
 wherein the early reflection generation stage includes a series connection of
 two or more cross-coupling matrices with a set of delay lines positioned
 between the two matrices.
4. An in-line early reflection generation system according to claim 2 or claim 3
 wherein said cross-coupling matrix or matrices are orthonormal matrices.
5. An in-line early reflection generation system according to claim 1 wherein
 each input is coupled to every output to provide a maximisation of diffusion
 of the input signals to all of the outputs.
6. An in-line early reflection enhancement system according to any one of
 claims 1 to 5 in combination with a wideband non-in-line assisted
 reverberation system which increases apparent room volume, including
 multiple loudspeakers to broadcast sound into the room, and a
 reverberation matrix connecting a similar bandwidth signal from each
 microphone through one or more reverberators having an impulse response
 consisting of a number of echoes the density of which increases over time,
 to one or more loudspeakers.

7. An in-line early reflection enhancement system according to claim 6 wherein in said wideband non-in-line assisted reverberation system the reverberation matrix connects a similar bandwidth signal from each microphone through one or more reverberators to at least two loudspeakers each of which receives a signal comprising a sum of at least two reverberated microphone signals.
8. A method for enhancing the acoustics of a room or auditorium comprising detecting predominantly direct sound with one or more microphones positioned close to one or more sound sources, generating a number of delayed reproductions of the microphone signals in an early reflection generation stage and which has unitary power gain whereby the stability of the system is independent of the delay times and amplitudes, and broadcasting said early reflected energy into the room.
9. A method according to claim 8 wherein the early reflection generation stage includes at least one cross coupling matrix.
10. A method according to claim 8 wherein the early reflection generation stage includes a series connection of two or more cross-coupling matrices with a set of delay lines position between the two matrices.
11. A method according to claim 9 or claim 10 wherein said cross-coupling matrix or matrices are orthonormal matrices.
12. A method according to claim 8 wherein each input is coupled to every output to provide a maximisation of diffusion of the input signals to all of the outputs.

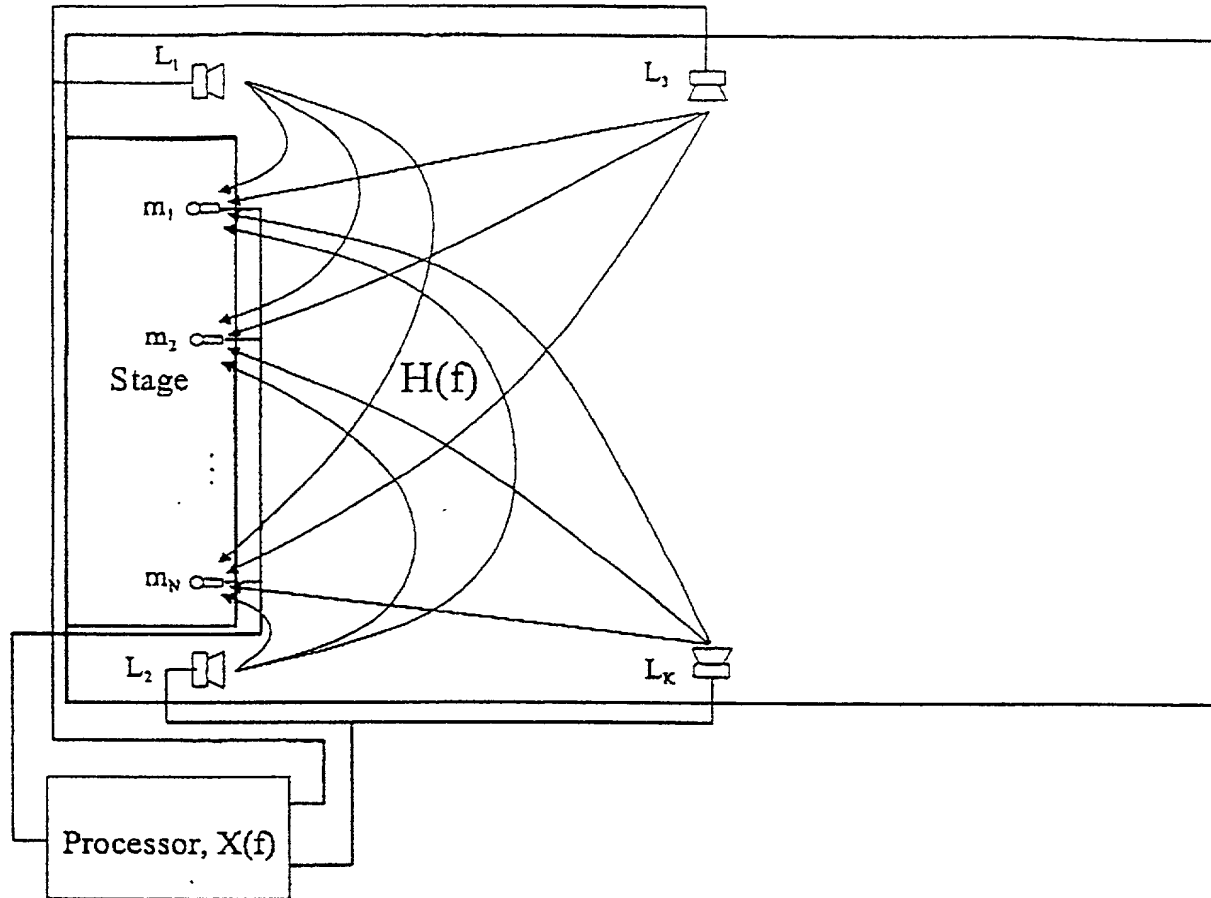
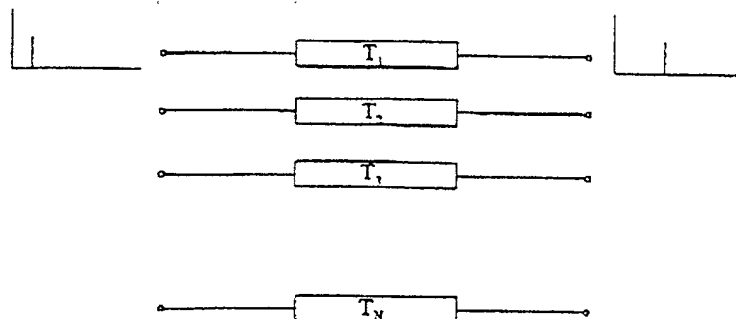
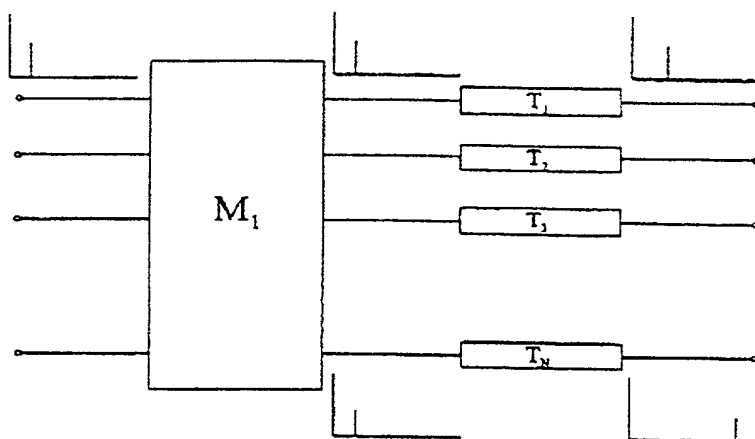
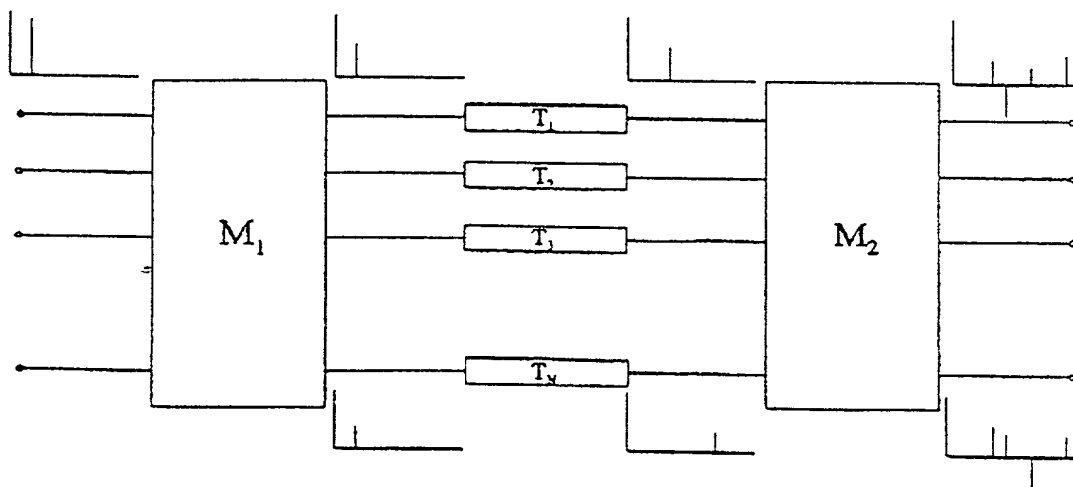


Figure 1

09/673808-011201

**Figure 2****Figure 3****Figure 4**

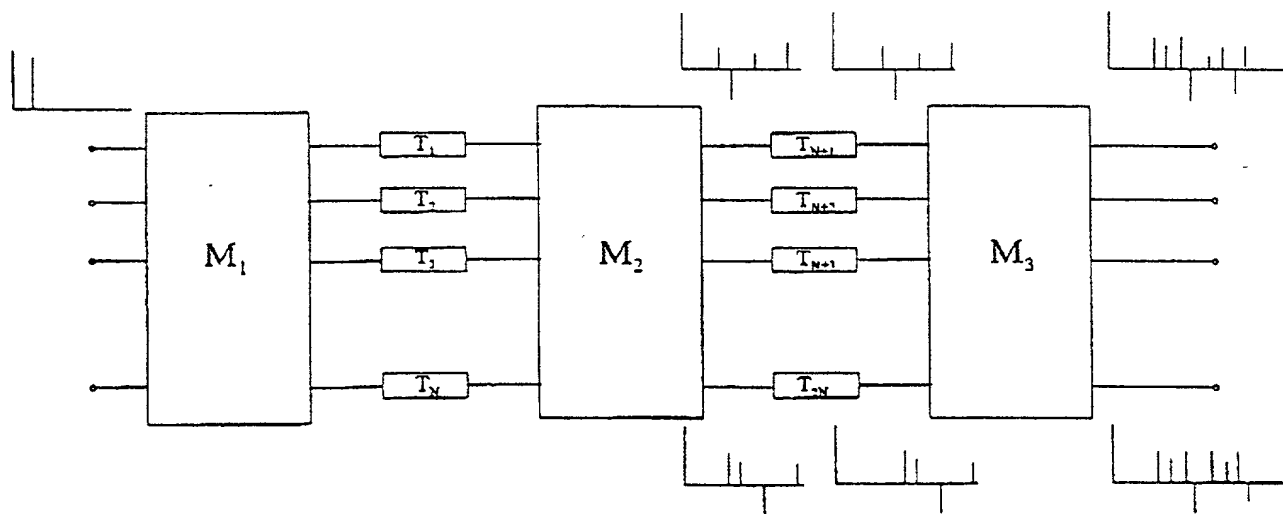


Figure 5

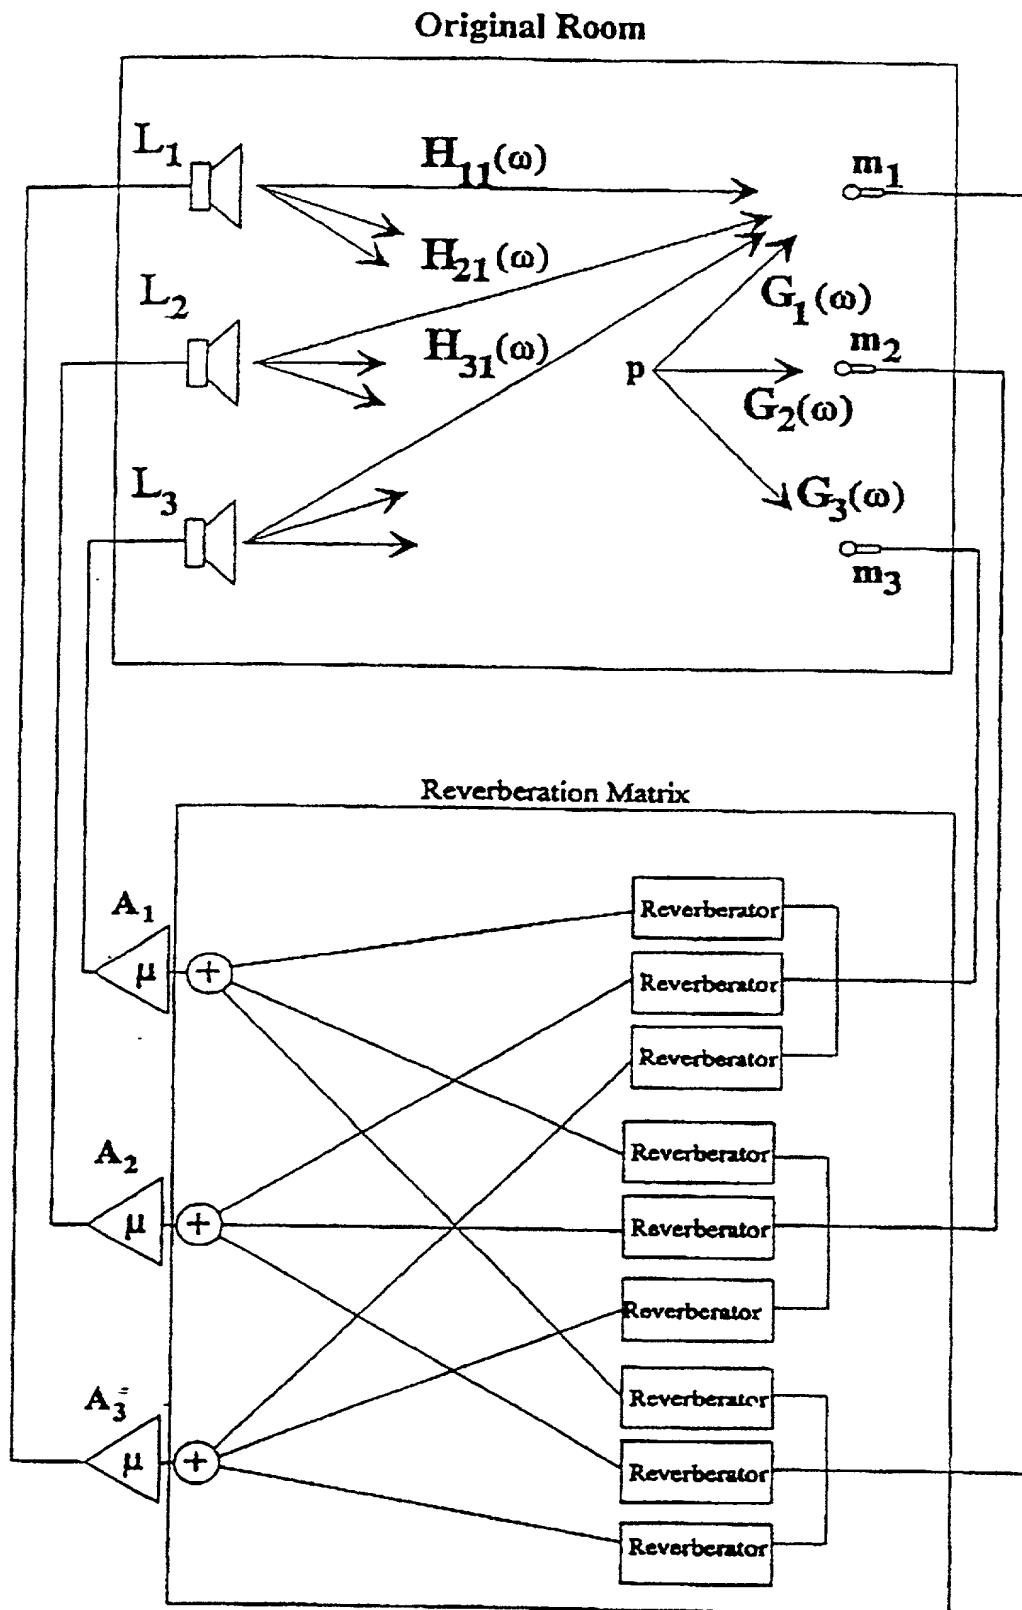


Figure 6

DECLARATION, POWER OF ATTORNEY AND POWER TO INSPECT

As a below named inventor, I hereby declare:

that my residence, post office address and citizenship are as stated below next to my name;

that I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the invention entitled: **AN IN-LINE EARLY REFLECTION ENHANCEMENT SYSTEM FOR ENHANCING ACOUSTICS**

the specification of which [check one(s) applicable]

X was filed 23 April 1999 as PCT International/~~XXXXXXXXXXXXXXXXXXXX~~ PCT/NZ99/00049
and was amended by Amendment filed _____ (if applicable); [or];
is attached to this Declaration, Power of Attorney and Power to Inspect;

that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and

that I acknowledge my duty to disclose information which is material to the examination of this application in accordance with Rule 56(a) [37CFR§1.56(a)].

CLAIM UNDER 35 U.S.C. §119: I hereby claim foreign priority benefits under 35 USC §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application of which priority is claimed:

<u>Prior Foreign Application(s)</u>	<u>Filing Date</u>	<u>Priority Claimed</u>
<u>Application No.</u> <u>Country</u>	<u>Day-Mo-Year</u>	<u>Yes - No</u>
330268 New Zealand	23 - 04 - 98	Yes

POWER OF ATTORNEY: As inventor, I hereby appoint the practitioners associated with **Customer No. 000110** as my attorneys or agents with full power of substitution to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: **Vincent T. Pace, Reg. No. 31,049** and **Henry H. Skillman, Reg. No. 17,352**

POWER TO INSPECT: I hereby give **DANN, DORFMAN, HERRELL AND SKILLMAN, P.C.** of Philadelphia, PA or its duly accredited representatives power to inspect and obtain copies of the papers on file relating to this application.

SEND CORRESPONDENCE TO: CUSTOMER NUMBER 000110

DIRECT INQUIRIES TO: Vincent T. Pace

Telephone 215-563-4100
Facsimile 215-563-4044

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SOLE OR FIRST JOINT INVENTOR

Full Name MARK POLETTI
First Middle Last
Signature [Signature]
Date 11/12/00
Residence Wellington NZ NEW ZEALAND
City State or Country
Citizenship NEW ZEALAND
Post Office Address:
Flat 20, 20 Invercargill Drive
Kelson, Wellington NEW ZEALAND
City State or Country Zip Code

SECOND JOINT INVENTOR (if any)

Full Name _____
First Middle Last
Signature _____
Date _____
Residence _____
City State or Country
Citizenship _____
Post Office Address: _____

City State or Country Zip Code